


BT / SPU DRILL CHUCK ADAPTER

BT / SPU 直結式鑽夾頭

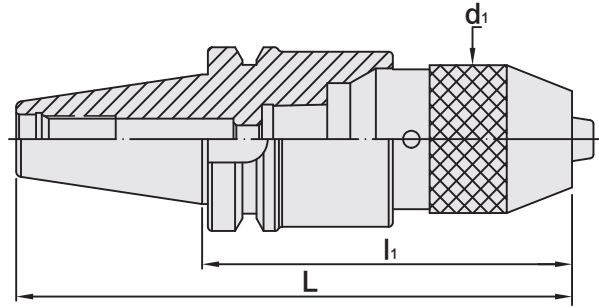

MODEL NO.	TYPE	L	li	di	CLAMPING CAPACITY	WEIGHT (KGS)
5010-669-008-080	BT30 x SPU8 - 80	128.4	80	37	1 ~ 8	0.72
5010-669-013-110	BT30 x SPU13 - 110	158.4	110	50	1 ~ 13	1.85
5010-669-016-115	BT30 x SPU16 - 115	163.4	115	57	3 ~ 16	2.18
5011-669-008-085	BT40 x SPU8 - 85	150.4	85	37	1 ~ 8	1.60
5011-669-013-100	BT40 x SPU13 - 100	165.4	100	50	1 ~ 13	2.00
5011-669-016-105	BT40 x SPU16 - 105	170.4	105	57	13 ~ 16	2.20
5012-669-008-090	BT50 x SPU8 - 90	191.8	90	37	1 ~ 8	4.16
5012-669-013-100	BT50 x SPU13 - 100	201.8	100	50	1 ~ 13	4.70
5012-669-013-120	BT50 x SPU13 - 120	221.8	120	50	1 ~ 13	5.00
5012-669-013-180	BT50 x SPU13 - 180	281.8	180	50	1 ~ 13	5.80
5012-669-016-105	BT50 x SPU16 - 105	206.8	105	57	3 ~ 16	5.03
5012-669-016-190	BT50 x SPU16 - 190	291.8	190	57	3 ~ 16	6.00

Features:

- ▶ The adapter has a taper design to assemble with drill chuck and then lock with a screw, ensuring to have better stability and drill chuck would not fall off.
- ▶ Used for drilling.

Standard Accessory: • SPANNER

Pull Stud	Spanner	Torque Wrench Adapter (Pull Stud)	Spanner (Pull Stud)
			
P.W-67~68	P.W-80	P.W-78	P.W-82

